



UNIVERSAL COUNTER

- 6-DIGIT PROGRAMMABLE PROJECTION
- COUNTER/FREQUENCY/CLOCK/TIMER
- 0,1 HZ...50 kHz; UP/DW COUNTER, IRC
- DIGITAL FILTERS, TARE, LINEARIZATION, SUM
- SIZE OF DIN 96 x 48 MM
- POWER SUPPLY 10...30 V AC/DC; 80...250 V AC/DC
- Option
Comparators • Data output • Analog output
Three-color display - 20 mm

OM 653UQC

OMLINK

Type OM 653UQC is an inexpensive universal 6-digit panel counter/frequency meter/timer/clock designed for maximum efficiency and user comfort.

The instrument is based on a single-chip microcontroller, which secures good accuracy, stability and easy operation of the instrument.

OM 653UQC
UNIVERSAL COUNTER

OPERATION

The instrument is set and controlled by five buttons situated on the front panel. All programmable settings of the instrument may be performed in three adjusting modes:

LIGHT MENU is protected by optional number code and contains solely items necessary for instrument setting.

PROFI MENU is protected by optional number code and contains complete instrument setting.

USER MENU may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as performing firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off).

OPTION

COMPARATORS are assigned to monitor two limit values with relay output. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

DATA OUTPUTS are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the ASCII/PROFIBUS protocols.

ANALOG OUTPUTS will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current. The value of analog output corresponds with the displayed data. Its type and range are selectable in menu.

TIME BACKUP is suitable where time needs to be measured even in case of supply voltage outage (upon power supply outage the instrument does not display).

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Selection: measuring mode

Setting: measur. mode counter/frequency/timer/clock with adjustable calibration coefficient, time base and projection

Measur. modes: counter/frequency meter/UP-DW counter/frequency/counter for IRC

Measur. channels: A and B, two independent functions (number/frequency) can be evaluated from one measuring input)

Projection: -99999...999999 with stable or floating DT in format 10/24/60

EXCITATION

Range: 5/12/17/24 VDC/100 mA, for feeding sensors and transmitters

FUNCTIONS

Linearization: through linear interpolation in 25 points (solely via OM Link)

Tare: designed to reset display upon non-zero input signal

Preset: initial nonzero value that is always read after resetting the device

Current value: one-off setting of the initial value

Summation: registration of figures upon shift operation

Time backup: time is running even when the power supply is turned off (the display is off)

DIGITAL FILTERS

Exponential average: from 2...100 measurements

1/Fr.: filter to convert frequency to time

Rounding: setting the projection step for display

Input filter: passes the input signal up to 5...1 000 Hz

EXTERNAL CONTROL

Hold: display/instrument blocking

Lock: control keys blocking

Resetting: counter resetting

Start/Stop: timer/clock control

TECHNICAL DATA

INPUT

UQC Input	optional in configuration menu on contact, TTL, NPN/PNP 0...30/300 V, comparison levels are adjustable in the menu or automatic
Input frequency	0,1 Hz...50 kHz [Mode SINGLE] 0,1 Hz...20 kHz [Mode UP/DW] 0,1 Hz...20 kHz [Mode UP-DW] 0,1 Hz...20 kHz [Mode QUADR. - frequency] 0,1 Hz...10 kHz [Mode QUADR. - counter] (for duty cycle 50 %)
Measur. mode	SINGLE counter/frequency QUADR counter/freq. meter for IRC sensors UP/DW UP/DW counter/freq. meter - measures on inputs A, B (direction) and can display numbers/frequency UP - DW UP - DW counter/frequency - measures on inputs A (UP), B (DW) and can display numbers/frequency TIME Timer RTC Clock
Time base	0,5/1/5/10 s
Calibr. constant	0,00001...999999
Preset	0...999999
Input filter	0/5/40/100/1000 Hz
Functions	Preset Summation One time setting of the initial value Time backup [Timer/clock]
External input	1 input, on contact The following functions can be assigned: OFF input off LOCKK control keys blocking HOLD display stop TARE fare activation CLEAR display reset CLR.ST. counter/timer reset and preset SUM. sum showing CL.SUM. sum reset COUNT. switching counter/frequency display

PROJECTION

Display: -99999...999999, single color 7-segment LED;
-999...9999, 3-color 7-segment LED
Digit height: 14 or 20 mm
Display color: red or green (height 14 mm)
red/green/orange (height 20 mm)
Decimal point: adjustable - in menu
Brightness: adjustable - in menu

INSTRUMENT ACCURACY

TK: 50 ppm/°C
Accuracy: ±0,01% of range + 1 digit (frequency)
±0,02% of value ±2ms (timer)
±0,02% of value ±130ms (RTC)
Overload capacity: 2x; 10x (t < 30 ms) - not for 300 V
Watch-dog: reset after 500 ms
Digital filters: exponential average, rounding, input filter, 1/Fr.
Functions: data backup, Time backup, Preset, Sum, Tare
OM Link: Company communication interface for operation, setting and update of instruments.
Calibration: at 25°C and 40 % r.h.

COMPARATOR

Type: digital, menu adjustable, contact switch-on < 50 ms
Hysteresis mode: switching limit, hysteresis band „Lim ±1/2 Hys.“ and time (0...99,9 s) determining the switching delay
Mode C-Puls [L1] - automatic counter resetting at the set value
Mode Once [L1] - switching limit, which will switch off only after the counter has been reset
Mode On Run [L2] - output is active when the timer is running
Output: 1...2x Form A relays (250 VAC/30 VDC, 3 A);
1...2x open collector (30 VDC/100 mA)

DATA OUTPUTS

Protocol: ASCII, PROFIBUS DP
Data format: 8 bit + no parity + 1 stop bit (ASCII)
Rate: 300...230 400 Baud
9 600 Baud...12 Mbaud (PROFIBUS)
RS 232: isolated
RS 485: isolated, addressing (max. 31 instruments)

ANALOG OUTPUTS

Type: isolated, programmable with a 16 bit D/A converter, type and range of output is optional in the menu
Non-linearity: 0,1% of range
TK: 15 ppm/°C
Rate: response to change of value < 1 ms
Ranges: 0...2/5/10 V, ±10 V, 0...5 mA, 0/4...20 mA
(comp. < 600 Ω/12 V)

EXCITATION

Adjustable: 5/12/17/24 VDC/max. 2,5 W, isolated

POWER SUPPLY

Range: 10...30 V AC/DC, ±10 %, PF ≥ 0,4, I_{STR} < 40 A/1 ms, isolated
80...250 V AC/DC, ±10 %, PF ≥ 0,4, I_{STR} < 40 A/1 ms, isolated
Consumption: < 6,9 W/7,3 VA
Power supply is protected by a fuse inside the instrument.

MECHANIC PROPERTIES


Material: Noryl GFN2 SE1, incombustible UL 94 V-I
Dimensions: 96 x 48 x 120 mm (w x h x d)
Panel cutout: 90,5 x 45 mm (w x h)

OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1,5/2,5 mm²
Stabilization period: within 15 minutes after switch-on
Working temperature: -20°...60°C
Storage temperature: -20°...85°C
Protection: IP64 (front panel only)
El. safety: EN 61010-1, A2
Dielectric strength: 4 kVAC per 1 min test between supply and input
4 kVAC per 1 min test between supply and data/analog output
4 kVAC per 1 min test between input and relay output
2,5 kVAC per 1 min test between input and data/analog output
Insulation resistance: for pollution degree II, measuring cat. III
power supply > 670 V (PI), 300 V (DI)
input, output, PN > 300 V (PI), 150 V (DI)
EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

CONNECTION

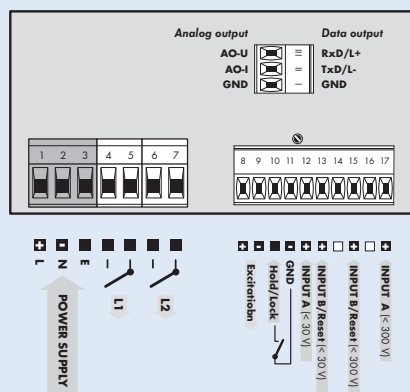

ORDER CODE

OM 653UQC

- -

Power supply	10...30 V AC/AC	0					
	80...250 V AC/DC	1					
Comparators	no	0					
	1x relay (Form A)	1					
	2x relay (Form A)	2					
	1x open collector	3					
	2x open collector	4					
Output	none	0					
	Analog output	2					
	RS 232	3					
	RS 485	4					
	PROFIBUS	6					
Excitation	yes			1			
Time backup	no				0		
	Only for measur. mode „Timer/clock“	yes			1		
Display color	red [14 mm]					1	
	green [14 mm]					2	
	red/green [20 mm]					3	
Specification	customized version, do not fill in						00

Basic configuration of the instrument is indicated in bold.