



OMB 412UNI

OMLINK

The OMB 412 model series are panel programmable three-color bargraphs with auxiliary display designed for maximum efficiency and user comfort while maintaining its favourable price.

The OMB 412UNI is a multifunction instrument with the option of configuration for 8 various input options, easily configurable in the instrument menu.

The instrument is based on a single-chip microcontroller with multichannel 4-bit sigma-delta converter, which secures high accuracy, stability and easy operation of the instrument.

UNIVERSAL BARGRAPH

- VERTICAL BARGRAF - 24 LED WITH DISPLAY
- MULTIFUNCTION INPUT (DC, PM, RTD, T/C, DU)
- DIGITAL FILTERS, TARE, LINEARIZATION
- SIZE OF DIN 48 x 96 MM
- POWER SUPPLY 10...30 V AC/DC; 80...250 V AC/DC
- Option
Comparators • Data output • Analog output
Measured data record

OMB 412UNI

DC VOLTMETER AND AMMETER
PROCESS MONITOR
OHMMETER
THERMOMETER FOR PT/CU/NI/THERMOCOUPLES
DISPLAY UNIT FOR LINEAR POTENTIOMETERS

OPERATION

The instrument is set and controlled by five buttons located on the front panel. All programmable settings of the instrument may be performed in three adjusting modes:

LIGHT MENU is protected by optional number code and contains solely items necessary for instrument setting.

PROFI MENU is protected by optional number code and contains complete instrument setting.

USER MENU may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as performing firmware updates (with DML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off). The measured units may be projected on the display.

OPTION

COMPARATORS are assigned to monitor four or eight limit values with relay output. For each input the user may select an arbitrary number of relays with the regime: LIMIT/BATCH/FROM-TO. The limits have adjustable hysteresis within full range of the display and selectable delay of the switch-on within the range of 0...99 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

DATA OUTPUTS are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the ASCII/MESSBUS/MODBUS/PROFIBUS protocol.

ANALOG OUTPUTS will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current and the option of assigning it to arbitrary input. The value of analog output corresp. with the displayed data and its type and range are selectable in menu.

MEASURED DATA RECORD is an internal time control of data collection. It is suitable where it is necessary to register measured values. Two modes may be used. FAST is designed for fast storage (40 records/s) of all measured values up to 8 000 records. Second mode is RTC, where data record is governed by Real Time with data storage in a selected time segment and cycle. Up to 266 000 values may be stored in the instrument memory. Data transmission into PC via serial interface RS232/485 and OM Link.

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Selection: of input type and measuring range

Measuring range: adjustable, either fixed or with automatic change (OHM)

Setting: manual, optional projection on the display may be set in menu for both limit values of the input signal, e.g. input 0...10,00 V > 0...850.0

Projection: 24 LED + 3-digit auxiliary display

EXCITATION

Range: 5...24 VDC/1,2 W for feeding sensors and transmitters

COMPENSATION

Of conduct (RTD, OHM): automatic (3- or 4-wire) or manual in menu (2-wire)

Of conduct in probe (RTD): internal connection (conduct resistance in measuring head)

Of CJC (T/C): manual or automatic, in menu it is possible to perform selection of the type of thermocouple and compensation of cold junctions, which is adjustable or automatic (temperature of terminals)

FUNCTIONS

Linearization: linear interpolation in 50 points (only via OM Link)

Tare: designed to reset display upon non-zero input signal

Min./max. value: registration of min./max. value reached during measurement

Peak value: the display shows only max. or min. value

Mathemat. operations: polynomial, 1/x, logarithm, exponential, power, root, sin x

DIGITAL FILTERS

Floating average: from 2...30 measurements

Exponential average: from 2...100 measurements

Arithmetic average: from 2...100 measurements

Rounding: setting the projection step for display

EXTERNAL CONTROL

Lock: control keys blocking

Hold: display/instrument blocking

Tare: tare activation

Resetting MM: resetting min/max value

TECHNICAL DATA

INPUT				
DC	Range	optional in configuration menu		
		±60 mV > 100 MΩ Input U		
		±160 mV > 100 MΩ Input U		
		±300 mV > 100 MΩ Input U		
		±1200 mV > 100 MΩ Input U		
PM	Range	optional in configuration menu		
		0...20 mA < 400 mV Input I		
		4...20 mA < 400 mV Input I		
		±2 V 1 MΩ Input U		
		±5 V 1 MΩ Input U		
		±10 V 1 MΩ Input U		
±40 V 1 MΩ Input U				
OHM	Range	optional in configuration menu with aut. range change		
		0...100 Ω		
		0...1 kΩ 0...10 kΩ 0...100 kΩ		
Connect.	2, 3 or 4 wire			
RTD	Type	optional in configuration menu		
		EU > 100/500/1 000 Ω, with 3 850 ppm/°C -50°...450°C		
		US > 100 Ω, with 3 920 ppm/°C -50°...450°C		
		RU > 50 Ω with 3 910 ppm/°C -200°...1 100°C		
Connect.	2, 3 or 4 wire			
Ni	Type	optional in configuration menu		
		Ni 1 000/10 000 with 5 000 ppm/°C -50°...250°C		
		Ni 1 000/10 000 with 6 180 ppm/°C -50°...250°C		
Connect.	2, 3 or 4 wire			
Cu	Type	optional in configuration menu		
		Cu 50/100 with 4 260 ppm/°C -50°...200°C		
		Cu 50/100 with 4 280 ppm/°C -200°...200°C		
Connect.	2, 3 or 4 wire			
T/C	Type	optional in configuration menu		
		J (Fe-CuNi) -200°...900°C		
		K (NiCr-Ni) -200°...1 300°C		
		T (Cu-CuNi) -200°...400°C		
		E (NiCr-CuNi) -200°...690°C		
		B (PtRh30-PtRh6) 300°...1 820°C		
		S (PtRh10-Pt) -50°...1 760°C		
		R (Pt3Rh-Pt) -50°...1 740°C		
		N (OmegaGalv) -200°...1 300°C		
		L (Fe-CuNi) -200°...900°C		
		P. supply	2 VDC/6 mA, Potentiometer resistance > 500 Ω	
		Ext. inputs	3 inputs, on contact	
			The following functions can be assigned:	
OFF / HOLD / LOCK / PASS / TARE / CL. TA. / CL. M.M. / SAVE / CL. ME. / CHAN. A. / FL. A. / MAT. FN. / SWITCH.				

OPTION „A“		
DC	Range	optional in configuration menu
		±0.1 A < 300 mV Input I
		±0.25 A < 300 mV Input I
		±0.5 A < 300 mV Input I
		±1 A < 30 mV Input I
		±5 A < 160 mV Input I
		±100 V 20 MΩ Input U
		±250 V 20 MΩ Input U
		±500 V 20 MΩ Input U

PROJECTION

Bar graph display: 24 LED
Bar color: red/green/orange
Auxiliary display: -99...999, single color 7-segment LED
Digit height: 9,1mm
Display color: red or green
Decimal point: adjustable - in menu
Brightness: adjustable - in menu

INSTRUMENT ACCURACY

TK: 50 ppm/°C
Accuracy: ±0.1% of range + 1 digit (for proj. 9999 and 5 measur/s) ±0.15% of range + 1 digit **RTD, T/C**
Accuracy of cold junction measur: ±1.5°C
Rate: 0.1...40 measur/s
Overload capacity: 2x; 10x (t < 30 ms) - not for > 250 V and 5 A
Resolution (RTD, T/C): 1°/0.1°/0.01°C
Line compensation: max. 30 Ω [RTD]
Cold junction compens. adjustable -20°...99°C or automatic
Linearization: linear interpolation in 50 points [only via DM Link]
Digital filters: Exp./Floating/Arithm. average, Rounding
Functions: Offset, Min/max value, Tare, Peak value, Mat. operations
Data record: measured data record into instrument memory
RTC: -15 ppm/°C, time-date-display value < 266k data
FAST: -display value < 8k data
DM Link: Company communication interface for operation, setting and update of instruments.
Watch-dog: reset after 400 ms
Calibration: at 25°C and 40 % r.h.

COMPARATOR

Type: digital, menu adjustable, contact switch-on < 30 ms
Hysteresis mode: switching limit, hysteresis band „Lim ±1/2 Hys.“ and time (0...99.9 s) determining the switching delay
Mode From-To: switching on and switching off interval
Mode Batch: period, its multiples and time (0 ... 99.9 s), within which the output is active
Output: 1...2x relays Form A (250 VAC/30 VDC, 3 A) and 1...2x relays Form C (250 VAC/50 VDC, 3 A); 2x/4x open collector (30 VDC/100 mA); 2x SSR (250 VAC/ 1 A); 2x bistable relays (250 VAC/250 VDC, 3 A/0,3 A)

DATA OUTPUTS

Protocol: ASCII, MESSBUS, MODBUS RTU, PROFIBUS DP
Data format: 8 bit + no parity + 1 stop bit (ASCII)
 7 bit + even parity + 1 stop bit (Messbus)
Rate: 800...230 400 Baud, 0,0096...12 Mbaud [PROFIBUS]
RS 232: isolated
RS 485: isolated, addressing (max. 31 instruments)

ANALOG OUTPUTS

Type: isolated, programmable with a 16-bit D/A converter, output type and range are optional in the menu
Non-linearity: 0.1% of range
TK: 15 ppm/°C
Rate: response to change of value < 1 ms
Ranges: 0...2/5/10 V, ±10 V, 0...5 mA, 0/4...20 mA (comp. < 600 Ω/12 V or 1 000 Ω/24 V)

EXCITATION

Adjustable: 5...24 VDC/max. 1.2 W

POWER SUPPLY

Range: 10...30 V AC/DC, ±10 %, PF ≥ 0.4, I_{SC} < 40 A/1 ms, isolated
 80...250 V AC/DC, ±10 %, PF ≥ 0.4, I_{SC} < 40 A/1 ms, isolated
Consumption: < 10.3 W/10.1 VA
Power supply is protected by a fuse inside the instrument.

MECHANICAL PROPERTIES


Material: Noryl GFN2 SE1, incombustible UL 94 V-1
Dimensions: 48 x 96 x 120 mm (w x h x d)
Panel cutout: 45 x 90.5 mm (w x h)

OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1.5/2.5 mm²
Working temperature: -20°...60°C
Storage temperature: -20°...80°C
Protection: IP64 (front panel only)
El. safety: EN 61010-1, A2
Dielectric strength: 4 kVAC per 1 min test between supply and input
 4 kVAC per 1 min test between supply and data/analog output
 4 kVAC per 1 min test between input and relay output
 2.5 kVAC per 1 min test between input and data/analog output
Insulation resistance: for pollution degree II, measuring cat. III
 power supply > 670 V (PI), 300 V (DI)
 input, output, PN > 300 V (PI), 160 V (DI)
EMC: EN 61326-1
Seismic capacity: IEC 980: 1993, par. 6
SW validation: Class B, C in compl. with IEC 62138, 61226

PI - Primary insulation, DI - Double insulation

CONNECTION

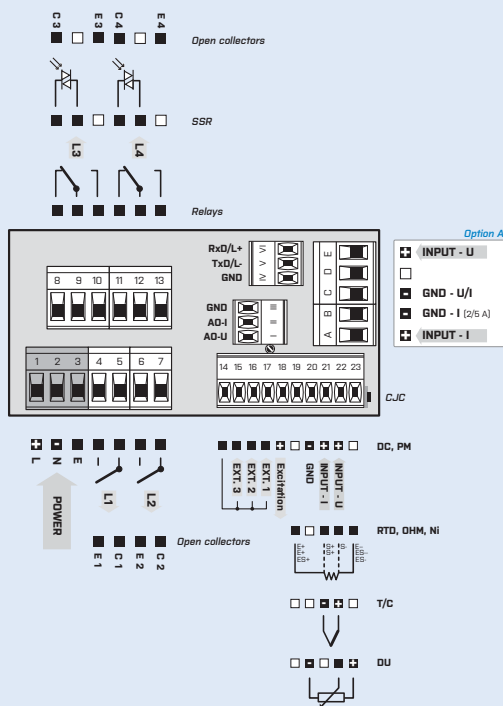

*GND (Input + Option A) is galvanically connected with inputs EXT. and the DM Link connector

ORDER CODE

OMB 412UNI

Power supply	10...30 VDC/24 VAC 80...250 V AC/DC
Measuring range	standard option „A“
Comparators	no 1x relay [Form A] 2x relay [Form A] 3x relays [2x Form A + 1x Form C] 4x relays [2x Form A + 2x Form C] 2x open collector 4x open collector 2x open collector + 2x relays [Form C] 2x relays [Form C] 2x SSR 2x relays, bistable 1x relay [Form C]
Analog output	no yes [compensation < 600 Ω/12 V] yes [compensation < 1000 Ω/24 V]
Data output	no RS 232 RS 485 MODBUS* PROFIBUS
Excitation	yes
Data record	no RTC FAST
Display color	red [14 mm] green [14 mm]
Specification	customized version, do not fill in SW validation - IEC 62138, IEC 61226

Basic configuration of the instrument is indicated in bold.

* Unavailable in combination with RTC/FAST